



FORTERO® Pro

The medium-size windproof parasol

NEW



Unique selling proposition

- F-line Pro design language: uniform design of the models Fortello Pro, Fortero Pro and Fortino Pro
- Counter-rotating opening principle:
Quick and easy operation using tensioning lever
High closing height (no need to move the furniture)
- 60 km/h wind stability at size 300 × 300 cm
- Top quality material selection
- Osyrion Spot battery-powered LED light with remote
- Quickship program available

Places of use

- Small area outdoors
- Terraces & rooftops
- Public spaces & parks
- **NEW** Corrosive environments



Swiss
Made



FORTERO® Pro

The medium-size windproof parasol

NEW

Basic model

Frame

- 8 parts made from anodised aluminium
- Profiled two-part mast
- Mast profile Ø 55 mm and 2.5 mm wall thickness
- Roof struts 20 × 26 mm

Frame material

- Aluminium: EN-AW-6063-T5
- Screws and rivets made from stainless steel A4
- Glass-fibre reinforced plastic parts: PA6GF30
- Anodisation:
 - Profile surface finishing
 - High degree of hardness – wear resistance (“scratch-resistant”)
 - Increased corrosion resistance
 - Natural appearance (adaptation to environment)
 - Modern look (luxurious matt)

Frame colour

- Anodised natural matt

Opening principle

- Counter-rotating (telescopic system)
- Fast opening thanks to slide and tensioning lever

Canopy

- Without flounce (flounce for a surcharge)
- Self-tautening thanks to the flexible strut ends
- Available in 3 fabric qualities:
 - 100 % polyacrylic approx. 300 g/m² (spun dyed)
 - 100 % polyester approx. 250 g/m² (spun dyed)
 - 100 % polyester approx. 220 g/m² (piece dyed)
- Replaceable or interchangeable canopies

Wind stability

- Up to 65 km/h (with fixed anchorage)
- Tested in a wind tunnel

Fixations

[More information](#)

- Bases / parasol stands / covers
- Ground sockets
- Mounting plates without or with installation height made to measure
- Mounting plates for insulation floors
- Base plates made to measure

Additional options – Standard accessories


[More information](#)

- Osyryon Spot battery-powered LED light, removable
- Protective cover


Special product solutions – Made to measure

[More information](#)


- Mast extensions & reductions
 - max. + 300 mm / - 550 mm
- Glatz Green® Special fabric
- Special fabrics (third-party fabrics, flame retardant)
- Custom flounces & edging strips
- Printing & advertising print

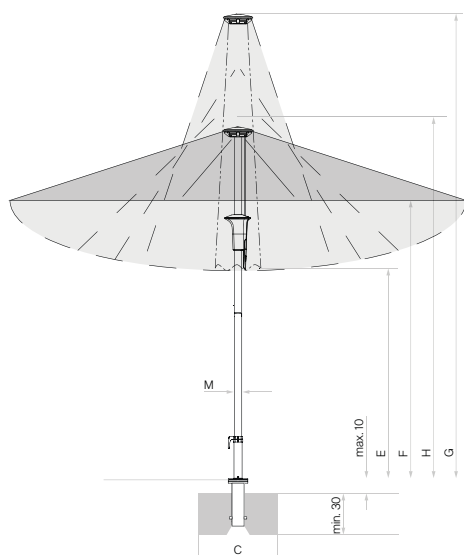


Loose cover max. 10 cm, concrete
thickness min. 30 cm (pay attention to
frost depth), guarantee water drainage



8 parts



8 parts



8 parts

Nominal size	Lateral distance	Mast Ø	Area covered	Height closed	Clear headroom	Total height	Height open	Foundation	Minimum weight for base	max. wind speed open
cm	cm	cm	m²	cm	cm	cm	cm	cm	kg	km/h (Bft.)
A	AS	M		E	F	G	H	C		
Ø 350	325	5.5	8.7	133	215	310	257	70 x 70	90	55 (7)
300 x 300	-	5.5	9.0	106	215	318	255	70 x 70	90	60 (7)
350 x 350	-	5.5	12.3	82	215	331	262	80 x 80	120	50 (7)
300 x 200	-	5.5	6.0	125	215	305	251	70 x 70	70	65 (8)
350 x 250	-	5.5	8.8	104	215	319	255	70 x 70	90	55 (7)

The listed measures represent extrapolated average values that may be slightly different on the product ($\pm 2\% \pm 5$ cm).

Using PX ground socket with connecting tube leaves an additional 10.5 cm.

Height dimensions are based on ground socket M4. If one of the offered bases is used, these measures raise by 9.5–16 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.



furnituredesignhouse.com

Furniture Designhouse

Ho Ho Kus, NJ 07423

201.689.9422

sales@FurnitureDesignhouse.com