



## FORTINO® Pro

The compact windproof parasol

NEW



### Unique selling proposition

---

- F-line Pro design language: uniform design of the models Fortello Pro, Fortero Pro and Fortino Pro
- Modern look thanks to extra flat roof of the parasol
- Counter-rotating opening principle:  
Quick and easy operation using tensioning lever  
High closing height (no need to move the furniture)
- 80 km/h wind stability at size Ø 250 cm
- Top quality material selection

### Places of use

---

- Small area outdoors
- Terraces & rooftops
- Public spaces & parks
- Corrosive environments





# FORTINO® Pro

The compact windproof parasol

NEW

## Basic model

---

### Frame

- 8 parts made from anodised aluminium
- Profiled two-part pole
- Pole profile Ø 38.4 mm and 2 mm wall thickness
- Roof struts 14 × 20 mm

### Frame material

- Aluminium: EN-AW-6063-T5
- Screws and rivets made from stainless steel A4
- Glass-fibre reinforced plastic parts: PA6GF30
- Anodisation:
  - Profile surface finishing
  - High degree of hardness – wear resistance (“scratch-resistant”)
  - Increased corrosion resistance
  - Natural appearance (adaptation to environment)
  - Modern look (luxurious matt)

### Frame colour

- Anodised natural matt

### Opening principle

- Counter-rotating (telescopic system)
- Fast opening thanks to slide and tensioning lever

### Canopy

- Without flounce (flounce for a surcharge)
- Self-tautening thanks to the flexible strut ends
- Available in fabric qualities:
  - 100 % polyacrylic approx. 300 g/m² (spun dyed)

- Replaceable or interchangeable canopies

### Wind stability

- Up to 80 km/h (with fixed anchorage)
- Tested in a wind tunnel

## Fixations

---

[More information](#)

- Bases / parasol stands
- Ground sockets
- Mounting plates without or with installation height made to measure\*
- Mounting plates for insulation floors\*
- Base plates made to measure\*
- \* Adapter required

## Additional options – Standard accessories

---

[More information](#)


- Osyrion Spot battery-powered LED light, removable
- Protective cover

## Special product solutions – Made to measure


---

[More information](#)


- Mast extensions & reductions
  - max. + 300 mm / - 550 mm
- Glatz Green® Special fabric
- Special fabrics (third-party fabrics, flame retardant)
- Custom flounces & edging strips
- Printing & advertising print

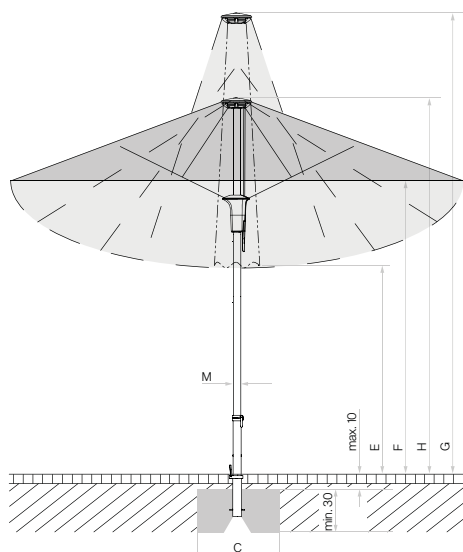

Loose cover max. 10 cm, concrete thickness min. 30 cm (pay attention to frost depth), guarantee water drainage



8 parts



8 parts

| Nominal size | Lateral distance | Pole Ø   | Area covered   | Height closed | Clear headroom | Total height | Height open | Foundation | Minimum weight for base | max. wind speed open |
|--------------|------------------|----------|----------------|---------------|----------------|--------------|-------------|------------|-------------------------|----------------------|
| cm           | cm               | cm       | m <sup>2</sup> | cm            | cm             | cm           | cm          | cm         | kg                      | km/h (Bft.)          |
| <b>A</b>     | <b>AS</b>        | <b>M</b> |                | <b>E</b>      | <b>F</b>       | <b>G</b>     | <b>H</b>    | <b>C</b>   |                         |                      |
| Ø 250        | 230              | 3.8      | 4.4            | 150           | 205            | 277          | 236         | 60 x 60    | 40                      | 80 (9)               |
| Ø 300        | 275              | 3.8      | 6.4            | 139           | 205            | 291          | 242         | 70 x 70    | 55                      | 60 (7)               |
| 200 x 200    | -                | 3.8      | 4              | 135           | 205            | 277          | 233         | 60 x 60    | 40                      | 70 (8)               |
| 250 x 250    | -                | 3.8      | 6.3            | 115           | 205            | 293          | 240         | 70 x 70    | 55                      | 55 (7)               |

The listed measures represent extrapolated average values that may be slightly different on the product ( $\pm 2\% \pm 5$  cm).

Height dimensions are based on ground socket BT. These vary slightly depending on the type of base. Except for steel base minus 5 cm.

For the variants with a mounting plate and the M4-to-Z adapter, the specified heights are reduced by 4–5 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage. A base with the specified minimum weight is not sufficient.

In the presence of several parasols, the minimum distance between one parasol and another and between parasols and walls shall be 20 cm.



**furnituredesignhouse.com**

Furniture Designhouse  
Ho Ho Kus, NJ 07423  
201.689.9422  
sales@FurnitureDesignhouse.com