



Point of use



Fixations



The PALAZZO<sup>®</sup> Style is suited to large outdoor surfaces; it is resistant to wind speeds of up to 115 km/h and protects against the sun and rain. The PALAZZO<sup>®</sup> Style can be opened and closed either manually with a maximum of 9 crank turns, or optionally via radio control, with an integrated motor. All control components and cables are installed in the pole and the frame and can be operated using a radio transmitter. In the event of the motor overheating, the PALAZZO<sup>®</sup> Style will switch off automatically and it has an emergency function so that it can be closed quickly.



## Material and technology

<b>Frame:</b>	4, 6 or 8 rods made of aluminium, with twist-proof pole (incl. reinforcement rods), with counter-rotating opening principle for convenient opening with only a few turns of the crank (handle). Profiled GLATZ pole profile Ø 105 mm, wall thickness 3 mm, with reinforcement rods. Rods: 23 x 50 mm, with a removable hand crank.
<b>Frame colour:</b>	anodized natural additional charge for powder-coated sunshade frames in other RAL colours: Price upon enquiry
<b>Frameform:</b>	round, rectangular or square
<b>Drive:</b>	with crank or with motor drive for greatest comfort
<b>Shade cover:</b>	tension can be adjusted using stepless strut extension material class 5 (100% polyacrylic approx. 300g/m <sup>2</sup> )

<b>Flounce:</b>	available with or without
<b>Protective cover:</b>	optional
<b>Total height closed:</b>	359–441 cm
<b>Height open:</b>	302–319 cm
<b>Wind:</b>	max. wind speed open perm. 115 km/h
<b>UV protection:</b>	depending on colour ≥ 98 % (based on test results of "Swiss Quality Testing Services")
<b>Light fastness:</b>	material class 5 = Level 7–8
<b>Water pressure:</b>	material class 5 ≥ water column 300 mm (depending on colour)

## Assortment

Nominal size cm	Order no.	Order no.	Order no.	Order no.	
	Frame with crank anodized natural without flounce	Frame with motor anodized natural without flounce	Frame with crank anodized natural with flounce	Frame with motor anodized natural with flounce	
○	³ Ø 350	230 00 350 171	231 00 350 171	230 00 350 170	231 00 350 170
	³ Ø 400	230 00 400 171	231 00 400 171	230 00 400 170	231 00 400 170
	³ Ø 450	230 00 450 171	231 00 450 171	230 00 450 170	231 00 450 170
	³ Ø 500	230 00 500 171	231 00 500 171	230 00 500 170	231 00 500 170
	³ Ø 600	230 00 600 171	231 00 600 171	230 00 600 170	231 00 600 170
□	⁴ 350 × 300	230 00 352 171	231 00 352 171	230 00 352 170	231 00 352 170
	⁴ 400 × 300	230 00 402 171	231 00 402 171	230 00 402 170	231 00 402 170
	⁴ 450 × 350	230 00 452 171	231 00 452 171	230 00 452 170	231 00 452 170
	⁴ 500 × 400	230 00 502 171	231 00 502 171	230 00 502 170	231 00 502 170
	⁴ 550 × 450	230 00 552 171	231 00 552 171	230 00 552 170	231 00 552 170
□	⁷ 300 × 300	230 00 301 171	231 00 301 171	230 00 301 170	231 00 301 170
	⁹ 350 × 350	230 00 351 171	231 00 351 171	230 00 351 170	231 00 351 170
	⁹ 400 × 400	230 00 401 171	231 00 401 171	230 00 401 170	231 00 401 170
	⁹ 450 × 450	230 00 451 171	231 00 451 171	230 00 451 170	231 00 451 170
	⁹ 500 × 500	230 00 501 171	231 00 501 171	230 00 501 170	231 00 501 170

Nominal size cm	Lateral distance cm	Pole Ø cm	Area covered m²	Slide distance cm	Height closed cm	Clear headroom cm	Total height cm	Height open cm	Foundation cm	Minimum weight for base kg	<sup>12</sup> max. wind speed open perm. km/h (wind force)
A	AS	M	B	D	E	F	G	H	C		
³ Ø 350	325	10.5	8.7	65	174	200	359	302	80 × 80	180	115 (11)
³ Ø 400	370	10.5	11.3	65	148	200	356	302	80 × 80	180	90 (10)
³ Ø 450	415	10.5	14.3	65	152	200	383	302	80 × 80	180	75 (9)
³ Ø 500	460	10.5	17.7	65	144	200	399	302	100 × 100	240	65 (8)
³ Ø 600	554	10.5	25.5	65	98	200	402	302	120 × 120	430	55 (7)
⁴ 350 × 300	-	10.5	10.5	65	135	200	371	302	80 × 80	180	85 (9)
⁴ 400 × 300	-	10.5	12.0	65	115	200	370	302	80 × 80	180	70 (8)
⁴ 450 × 350	-	10.5	15.8	65	108	200	397	302	100 × 100	240	75 (9)
⁴ 500 × 400	-	10.5	20.0	76	94	200	422	319	100 × 100	430	60 (7)
⁴ 550 × 450	-	10.5	24.8	76	80	200	441	319	120 × 120	430	55 (7)
⁷ 300 × 300	-	10.5	9.0	65	152	200	371	302	80 × 80	180	85 (9)
⁹ 350 × 350	-	10.5	12.3	65	106	200	359	302	100 × 100	240	95 (10)
⁹ 400 × 400	-	10.5	16.0	65	116	200	403	302	100 × 100	240	80 (9)
⁹ 450 × 450	-	10.5	20.3	76	91	200	417	319	100 × 100	430	70 (8)
⁹ 500 × 500	-	10.5	25.0	76	80	200	439	319	120 × 120	430	60 (7)

<sup>7</sup> 4 parts

<sup>8</sup> 6 parts

<sup>9</sup> 8 parts

<sup>12</sup> 10 km/h less with flounce

The above measures represent extrapolated average values that may be slightly different on the product ( $\pm 2\% \pm 5$  cm).

Height dimensions are based on ground socket M4. These differ slightly depending on the type of base. Except for base M4, 180 kg plus 15.5 cm, 240 kg plus 19 cm.

The max. wind speed limits as per our separate list apply only in the presence of a fix ground anchorage.

In the presence of several sunshades, the min. distance between one sunshade and another and between sunshades and walls shall be 20 cm.

Opening and closing using a battery-operated drill is not permitted.

## Accessories

	Order no.	
<b>Fixing option M4 / M8 / M16</b> (Support tube or Tip-over hinge absolutely necessary)		
1. Base M4 / M8 / M16, 430 kg / 620 kg (8 or 12 concrete elements) 101.2 × 22 – 26 / 31 – 35 cm, galvanised steel (without elements)	350 01 226 945	
2. Mounting plate M4 / M8, 30 × 30 × 1.5 cm, galvanised steel	350 01 226 921	
Set of concrete sections, 8 pieces, 48.3 × 48.3 × 9.4 cm, (ca. 385 kg), concrete	350 01 226 948	
<b>Fixing option M4</b> (support tube M4 absolutely necessary)		
3. Base M4, 180 kg, (for 12 plates 40 × 40 × 4 cm), 91 × 91 × 15.5 - 19.5 cm, galvanised steel (adjustable and levellable) (without plates)	350 01 108 335	
3. Base M4, 240 kg, (for 16 plates 40 × 40 × 4 cm), 91 × 91 × 19 - 23 cm, galvanised steel (adjustable and levellable) (without plates)	350 01 108 435	
4. Cover for base M4, 88 × 88 × 5 cm, brushed aluminium (imitate)	350 01 100 400	
Set of castors for base M4 (maximum weight 240kg), Ø 5 cm, H = 5.5 cm, galvanised steel	350 01 100 500	
5. Ground socket M4, galvanised steel	350 01 226 510	
6. Mounting plate M4 special, for installation height 50 – 149 mm, galvanised steel	350 01 226 932	
7. Mounting plate M4 special, for installation height 150 – 350 mm, galvanised steel	350 01 226 930	
Mounting plate M4 for isolated grounds, installation height made to measure, high-grade steel 1.4301 / 304	350 01 229 730	
8. Support tube M4 with profile PzS / PzN, galvanised steel (with cover, adjustable and revellable)	350 01 227 040	
<b>Fixing option M8</b> (tip-over hinge M8 absolutely necessary)		
9. Ground socket M8, galvanised steel	350 01 226 000	
6. Special mounting plate, M8, for heights of 50 – 149 mm, galvanised steel	350 01 229 707	
7. Special mounting plate, M8, for heights of 150 – 350 mm, galvanised steel	350 01 229 705	
Mounting plate, M8, for insulated base, height to order, high-grade steel 1.4301 / 304	350 01 229 732	
10. Tip-over hinge M8 with profile PzS / PzN, galvanised steel (adjustable and revellable)	350 01 225 040	
<b>Slabs for base M4</b>		
Slab set, 12 pieces, 40 × 40 × 4 cm, (ca. 165 kg), concrete	350 01 226 907	
Slab set, 12 pieces, 40 × 40 × 4 cm, (ca. 170 kg), 8 pieces concrete, 4 pieces polished granite	350 01 226 906	
Slab set, 16 pieces, 40 × 40 × 4 cm, (ca. 220 kg), concrete	350 01 226 904	
Slab set, 16 pieces, 40 × 40 × 4 cm, (ca. 225 kg), 12 pieces concrete, 4 pieces polished granite	350 01 226 903	
<b>Protective cover, coated polyester fabric</b>		
	<b>suitable for shade sizes in cm</b>	
11. Protective cover with zip and rod, 325 × 90 cm	Ø 350/Ø 400/Ø 450/Ø 500/350 × 300/400 × 300/300 × 300/350 × 350	350 01 609 811
11. Protective cover with zip and rod, 400 × 100 cm	Ø 600/450 × 350/500 × 400/550 × 450/400 × 400/450 × 450/500 × 500	350 01 609 821
<sup>5</sup> <b>Rain gutter and curtain</b> (suitable only for square and rectangular sunshades)		
12. Rain gutter conical 300 cm, PzNS, <sup>6</sup> 2/2, incl. fastener set acrylic/PVC		350 01 709 330 XXX
12. Rain gutter conical 350 cm, PzNS, <sup>6</sup> 3/3, incl. fastener set acrylic/PVC		350 01 709 332 XXX
12. Rain gutter conical 400 cm, PzNS, <sup>6</sup> 3/3, incl. fastener set acrylic/PVC		350 01 709 334 XXX
12. Rain gutter conical 450 cm, PzNS, <sup>6</sup> 3/3, incl. fastener set acrylic/PVC		350 01 709 336 XXX
12. Rain gutter conical 500 cm, PzNS, <sup>6</sup> 3/3, incl. fastener set acrylic/PVC		350 01 709 338 XXX
12. Rain gutter conical 550 cm, PzNS, <sup>6</sup> 3/3, incl. fastener set acrylic/PVC		350 01 709 346 XXX
13. Curtain 300 × 220 cm, PzS, <sup>6</sup> 2/ incl. fastener set acrylic		350 01 759 430 XXX
13. Curtain 350 × 220 cm, PzS, <sup>6</sup> 3/ incl. fastener set acrylic		350 01 759 432 XXX
13. Curtain 400 × 220 cm, PzS, <sup>6</sup> 3/ incl. fastener set acrylic		350 01 759 434 XXX
13. Curtain 450 × 220 cm, PzS, <sup>6</sup> 3/ incl. fastener set acrylic		350 01 759 436 XXX
13. Curtain 500 × 220 cm, PzS, <sup>6</sup> 3/ incl. fastener set acrylic		350 01 759 438 XXX
13. Curtain 550 × 220 cm, PzS, <sup>6</sup> 3/ incl. fastener set acrylic		350 01 759 440 XXX

<sup>5</sup>fabric colour must be indicated

<sup>6</sup>Number of fixation points (struts). For rain gutter left / right in drain direction.

## Accessories


	Order no.
<b>Accessories PALAZZO® Style with crank</b>	
14./15. <sup>6</sup> Control Pz14 for LED, 1 × 230 V, 10 A (remote control with 3- or 7-channels absolutely necessary)	350 01 559 010
15. Control Pz14 for heating, 3 × 400 V, 16 A (remote control with 3- or 7-channels absolutely necessary)	350 01 559 020
14./15. <sup>6</sup> Control Pz14 for LED and heater, 3 × 400 V, 16 A (7-channel remote control absolutely necessary)	350 01 559 030
14./15. <sup>6</sup> Control Pz14 for LED and heater, 1 × 230 V, 16 A max. 2 radiant heaters 1500 W or 20 A max. 4 radiant heaters 1000 W (7-channel remote control absolutely necessary)	350 01 559 035
<b>Accessories PALAZZO® Style E with motor (accessories absolutely necessary)</b>	
15. Control Pz14 for motor, 1 × 230 V, 10 A (3-channel remote control absolutely necessary)	350 01 559 100
14./15. <sup>6</sup> Control Pz14 for LED and motor, 1 × 230 V, 10 A (7-channel remote control absolutely necessary)	350 01 559 110
15. Control Pz14 for heating and motor, 3 × 400 V, 16 A (7-channel remote control absolutely necessary)	350 01 559 120
14./15. <sup>6</sup> Control Pz14 for LED, heater and motor, 3 × 400 V, 16 A (7channel remote control absolutely necessary)	350 01 559 130
<b>Electrical accessoires</b>	
16. Remote control, for wall installation, IP20, 3-channel, white	350 01 555 270
16. Remote control, for wall installation, IP20, 7-channel, white	350 01 555 280
16. Remote control, incl. wall bracket, IP20, 7-channel, black	350 01 555 290
17. Radiant heater (infrared heater) for Pz14 controls, polished aluminium, 1500 W, 230 V, 6.5 A, (incl. cable, max. of 4 radiant heater per sunshade)	350 01 570 320
<b>Miscellaneous items</b>	
High-grade steel kit (axis mounting and hinge set, 4 parts, lock) for use in corrosive environment	350 01 900 432
High-grade steel kit (axis mounting and hinge set, 6 parts, lock) for use in corrosive environment	350 01 900 632
High-grade steel kit (axis mounting and hinge set, 8 parts, lock) for use in corrosive environment	350 01 900 832
<sup>14</sup> Strap system, PzS 350 × 300, 300 × 300	350 01 900 180
<sup>14</sup> Strap system, PzS 400 × 300, 350 × 350	350 01 900 190
<sup>14</sup> Strap system, PzS 450 × 350, 400 × 400	350 01 900 200
<sup>14</sup> Strap system, PzS 500 × 400, 450 × 450	350 01 900 210
<sup>14</sup> Strap system, PzS 500 × 500	350 01 900 220
18. <sup>13</sup> Impact protection for shade pole, grey, detachable, H = 85cm	350 01 906 200
19. <sup>1</sup> Base transporter for sockets weighing 120 kg, 180 kg, 240 kg, 430 kg and 620 kg	350 01 909 000

<sup>1</sup>while stocks last

<sup>6</sup>Incl. 4 LED strips, warm white. LED version also as indirect lighting. The stripes are mounted/prepared on the forks. In addition, use article number 350 01 559 559.


<sup>13</sup>Certain shade sizes require the removal of the impact protection before closing the shade. See closing height table (E)

<sup>14</sup>Only available in conjunction with a new sunshade or a new cover.

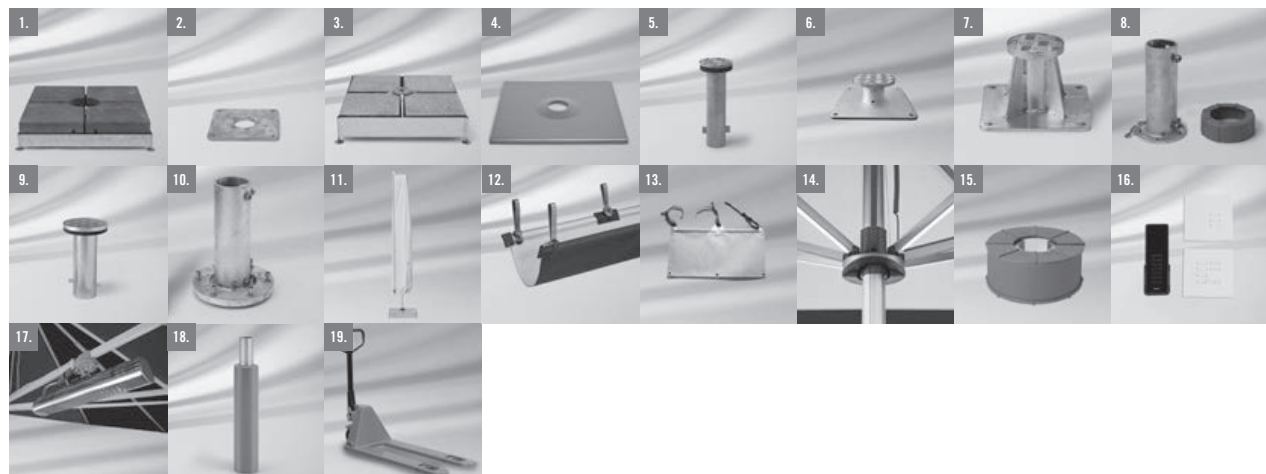





Beachclub O. Noordwijk, NL




8 parts

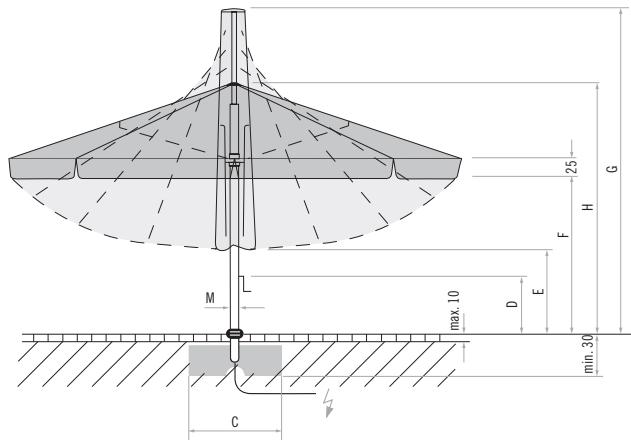


Loose cover max. 10 cm, concrete thickness min. 30 cm  
 (pay attention to frost depth), water outflow,  
 1 supply line to electric.




6 parts



8 parts



4 parts



8 parts





Kennedy Brasserie, Luxemburg



Zoo Basel



Restaurant, France

## **furniture designhouse.com**

Extreme outdoor furniture... handcrafted in Europe... Yet, surprisingly affordable!

**Loom Britannia Ltd**  
**Ho Ho Kus, NJ 07423**  
**201.689.9422**  
**sales@FurnitureDesignhouse.com**